

TUBOLED GLASS 10 (18)



- * Base: G13.
- * Operating voltage 100-240V.
- * LED tubes completely enveloped in glass.
- * Wide lighting distribution curve.
- * Color rendering > 80.
- * Operating voltage 220-240V.
- * Working position: universal.
- * Replacing 18W and 36W T8 tubes: high energy saving.
- * Immediate switch on, no flickering or buzzes.
- * Great flow maintenance.
- * USAGE INFORMATION
- * Do not use with dimmers.
- * In case fluorescent tubes must be replaced, follow the simple assembly instructions on the mounting instruction sheet.
- * Do not use in installations in series.
- * Wide Beam

Item Characteristics

Code	L18830G
Lamp Voltage	220-240 V
Nominal Power	10 W
Base	G13
Lamp Current	0,09 A
Nominal Flux	1050 LUMEN
Light Tonality	Warm White
Colour temperature	3000 K
Opening beam	300°
Diameter	28 mm
Lenght	604 mm

Performance

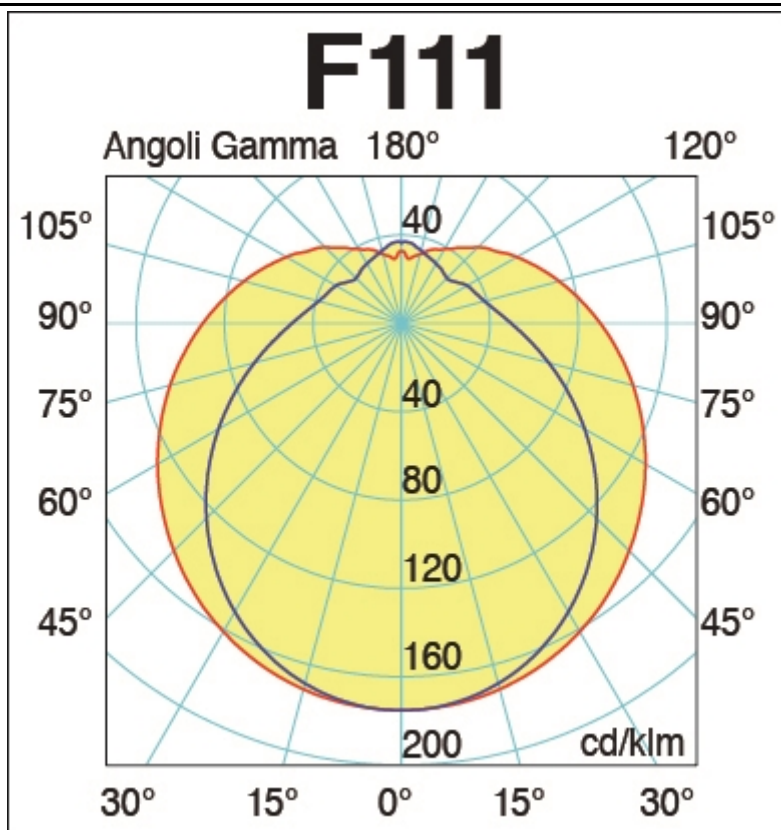
Photometry	F111
Irc/Ra	>80
Lifetime	25000 h
Energy Class	A+
kWh/1000h	10
Equivalence with incandescent lamp	75 W

Tech Info

Dimmable	NO
Operating Position	360°
Open fittings	YES

All parts of this document are Duralamp ownership. All rights reserved. This document and the included information are provided without any responsibility deriving from mistakes or omissions. No part of this document can be cut, reproduced or used without written authorization. Duralamp maintains the right to change the included data without notice due to improvements of the products.

Number of ON-OFF cycles	100000
Power Factor	0,5
Warm-up time up to 60 % of the full light output	Instant Full Light
Lamp start time	<0,2s
Mercury (mg)	0
LLMMF - Lamp lumen maintenance factor	70
T (°C) Working environment Temp.	-25°C / +35°C
Fulfilled Directives and norms	2011/65/UE * RoHS 2012/19/UE * RAEE 2014/30/UE * Compatibilità Elettromagnetica 2014/35/UE * Bassa Tensione EN 61547 * anno 2010 EN 55015 * anno 2014 EN 61000-3 -2 * anno 2007 (+A1/+A2:2011) EN 61000-3-3 * anno 2014 EN 62471 * anno 2010 IEC/TR 62471-2:2009 (CEI 34-141:2012 EN 62031 * anno 2009 (+A1:2013) EN 60598-1 * anno 2009 EN 60598-2-1 * anno 1997 EN 61347-1 * anno 2009 (+A1:2011, +A2:2013) EN 61347-2- 13 * anno 2007 EN 62031 * anno 2009 (+A1:2013) EN 62493 * anno 2010 EN 62776 Gruppo di rischio 0 2010/30/EU * Energy Consumption 874/2012 * Regulation for Energy Labelling 2009/125/CE * Progettazione Eco Compatibile 1194/2012 * Progettazione Eco Compatibile

Spectroradiometry and Photometry


Eulumdat file for lighting calculations available on the website

Shipping info

Single pack dimensions L x H x D (mm)	27 x 645 x 27
Item barcode	8011905838423
Pack	10 pz
Master barcode	8011905783709